



**PROFILE
DESIGN**

A3 REACH EXTENDER

INTRODUCTION

Thank you for purchasing this Profile Design product. These instructions apply to the A3 Reach Extender.

Please read these instructions thoroughly before attempting to install this item. Proper installation is required for compliance with Profile Design's warranty policy. If you are not familiar with installation of Aerobars or their accessories, please seek the assistance of your local Profile Design dealer by logging on to www.profile-design.com and using "dealer search" or by calling Profile Design's customer service number p.# 888.800.5999.

Note to Dealers: If you install this product for the consumer, please provide him/her with this owner's manual after installation.

Tools and materials required:

- 5mm Hex Wrench
- Torque Wrench with a 5mm Hex fitting
- Grease such as Finishline Premium Grease

Your kit should contain:

- Two (2) A3 Reach Extender
- Two (2) Stainless steel M6x35mm bolts
- Two (2) Washer

Products compatible with this extender:

- Any bar that uses the A3 Riser system
- Any bar that uses the A2 Riser system, with the addition of the A2-A3 adaptor (available separately)

This product is not compatible with:


- Our 31.8mm risers
- The Aeria 1 system
- Any bar that does not use our A3 or A2 risers

If anything is missing from the Riser kit please contact your dealer.

Please note that threaded areas have been pre-treated by Profile Design during production with a special blue thread locking compound. This special compound is easy to detect on the threads of all bolts provided. If you cannot detect this thread locking compound or you are re-installing the bolt, re-apply a suitable thread locking compound as available from Loctite® or another company before assembly.



WARNING: Periodically check the Aerobar for damage, particularly for scratches through the anodised coating (aluminium parts) or clearcoat (carbon parts) that could lead to degradation and weakening of the base material. Replace your Aerobar if you notice any damage from use or accident.

COMPONENT LIST


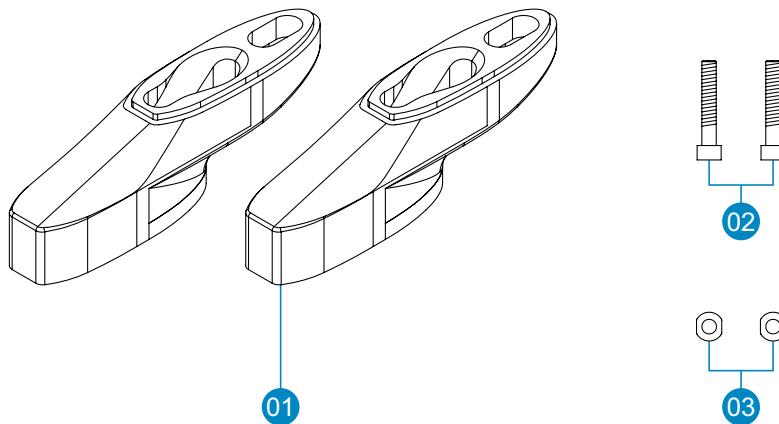


Ref.#	Part.#	QTY. Req.	Part Description
1	274480	2	Adapter - PFD A3 REACH EXTENDER Alloy Black
2	313530	2	M6x35SHB BK w/nylock
3	275674	2	Washer 6x12x1.5 UCP

PART DRAWINGS

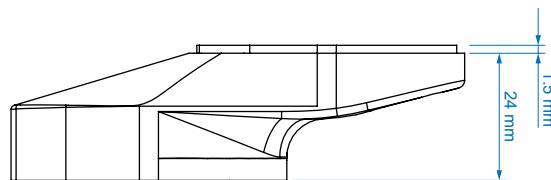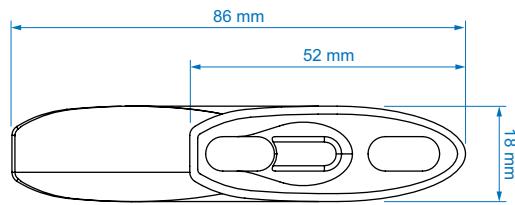

BRACKET BOLT LENGTH&TORQUE SETTINGS

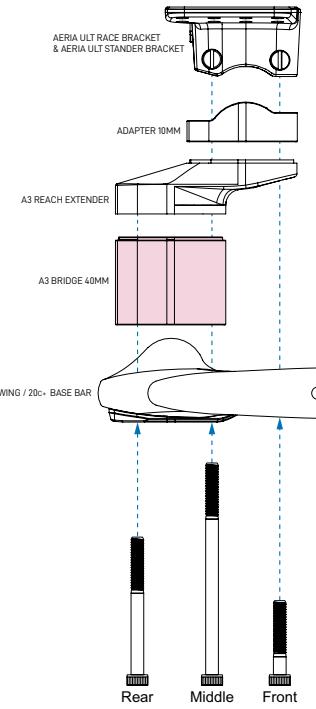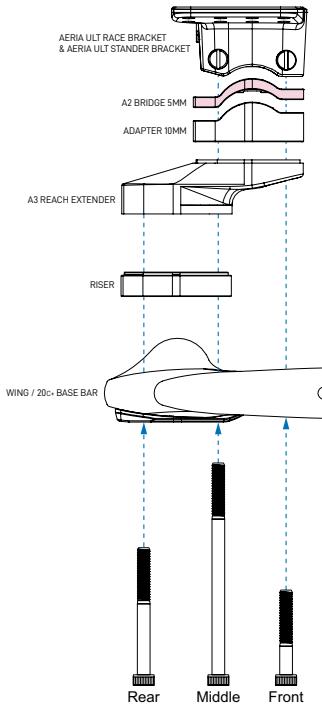


Basebar : WING / 20c+
 Bolt : M6 Head
 Unit : MM
 Front / Middle / Rear each needs 2pcs

A3 Riser(mm)	0	5	5	10	10+5	20	20+5	20+10	20+10+5	X	Torque
With A2 Bridge(mm)	X	X	5	5	5	5	5	5	5	X	
With A3 Bridge(mm)	X	X	X	X	X	X	X	X	X	40	
	Front	35				40				35	
Bolt Length	Middle	60	65	70	75	80	85	90	95	100	100
	Rear	25	30	35	40	45	50	55	60	65	



Before riding, ensure that the bolts are tightened to the torque specified in the Instruction Sheet.

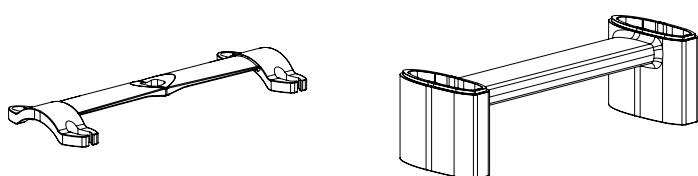


(With A2 BRIDGE 5MM)

(With A3 BRIDGE 5MM)

A2 BRIDGE 5MM

A3 BRIDGE 40MM

BRACKET BOLT LENGTH&TORQUE SETTINGS

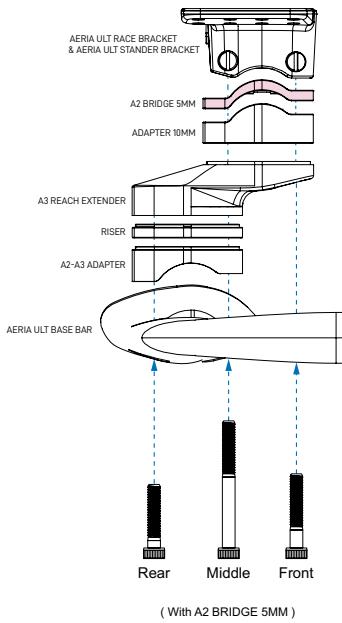

Basebar : AERIA ULT

Bolt : M6 Head


Unit : MM

Front / Middle / Rear each needs 2pcs

A3 Riser(mm)		0	0	5	10	10+5	20	20+5	20+10	Torque	
With A2 Bridge(mm)		X	5	5	5	5	5	5	5	6Nm (53 inlbf)	
Bolt Length	Front	35	40								
	Middle	65	70	75	80	85	90	95	100		
	Rear	30	30	35	40	45	50	55	60		




Before riding, ensure that the bolts are tightened to the torque specified in the Instruction Sheet.

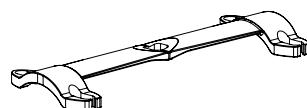

A2 BRIDGE 5MM

BRACKET BOLT LENGTH & TORQUE SETTINGS

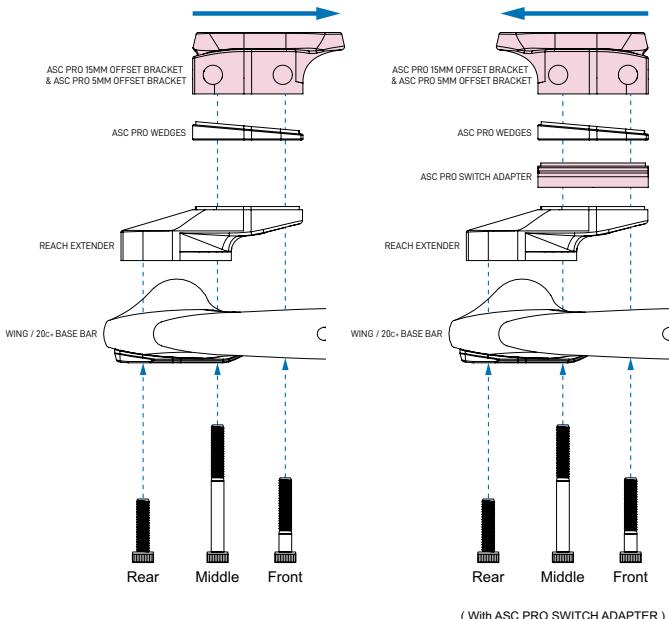

Basebar : WING / 20c+

Tilt Degree	-5	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10
Wedges	25	20	20	20	20	20	20	20	20	20	25	5+1	5+2	5+3	5+4	5+2+3
Wedges (with Switch Adapter)	60	55	55	55	55	55	55	55	55	55	55	(-5)+(-1)	(-5)+(-2)	(-5)+(-3)	(-5)+(-4)	(-5)+(-2)+(-3)

Bolt : M6 Head

Unit : MM

Front / Middle / Rear each needs 2pcs

Tilt Degree	-5	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10	Torque
Front	25					20			25			35		40			6Nm (53 inlbf)
Middle	60					55			55			60		65			6Nm (53 inlbf)
Rear												25					6Nm (53 inlbf)
With Switch Adapter	Front	35				40			35			40		50			
Middle	70					65			65			70		75			
Rear												25					




Before riding, ensure that the bolts are tightened to the torque specified in the Instruction Sheet.



ASC PRO SWITCH ADAPTER

BRACKET BOLT LENGTH & TORQUE SETTINGS

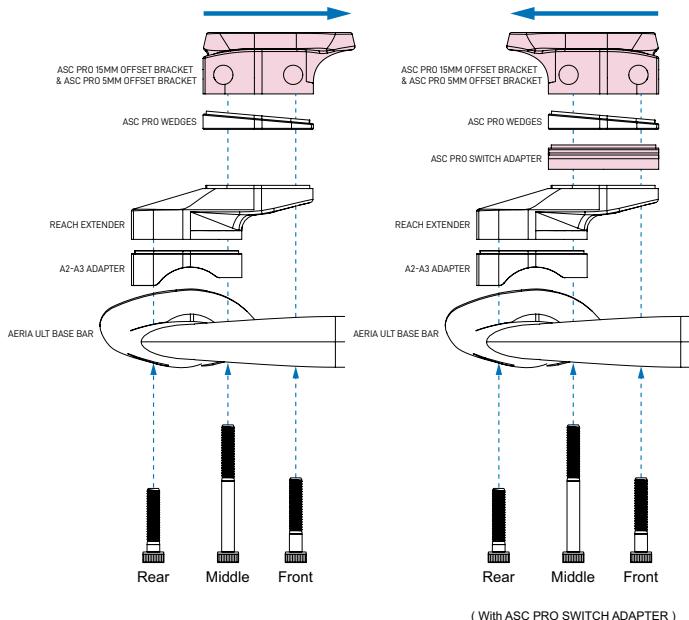

Basebar : AERIA ULT

Tilt Degree	-5	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10
Wedges	25	20	20	20	20	20	20	20	20	20	25	5+1	5+2	5+3	5+4	5+2+3
Wedges (with Switch Adapter)	60	55	55	55	55	55	55	55	55	55	55	(-5)+(-1)	(-5)+(-2)	(-5)+(-3)	(-5)+(-4)	(-5)+(-2)+(-3)

Bolt : M6 Head

Unit : MM

Front / Middle / Rear each needs 2pcs

Tilt Degree	-5	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10	Torque
Front						25		20		25		35		40			
Middle						60		55		60		65		65			
Rear												30					
With Switch Adapter																	
Front						35		30		35		45		50			
Middle						70		65		70		75		75			
Rear												30					

6Nm (53 inlbf)





Before riding, ensure that the bolts are tightened to the torque specified in the Instruction Sheet.




ASC PRO SWITCH ADAPTER

INSTALLATION INSTRUCTIONS


1. Consult the bolt length table to ensure you use the correct length bolts for your setup. Apply grease to the contact surfaces of the risers.
- Note that the extender cannot be mounted in the rearwards position.

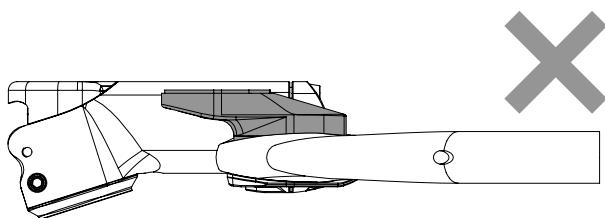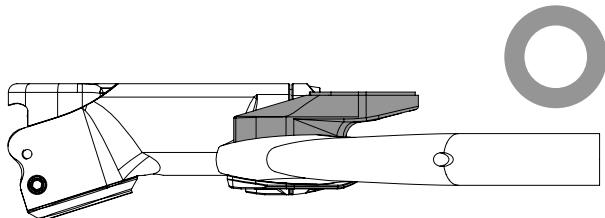


2. Assemble the risers with the Reach Extender at the top.

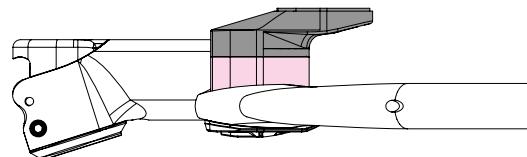


- If fitting to an Aeria Ultimate bar or other A2 platform bar, install the A2-A3 adaptor under the risers.

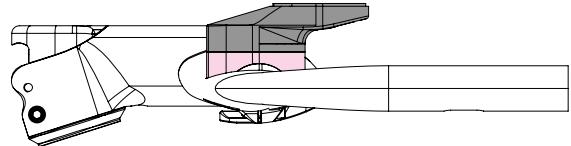


3. If using electronic gears, route the cable through the basebar and risers prior to installing the Reach Extender.

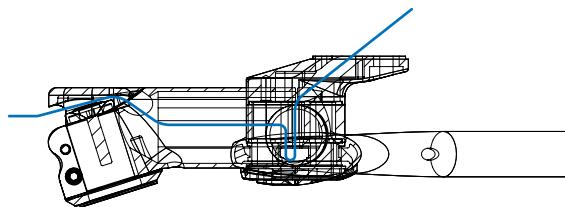


4. First install the rear bolt using a 5mm hex wrench.

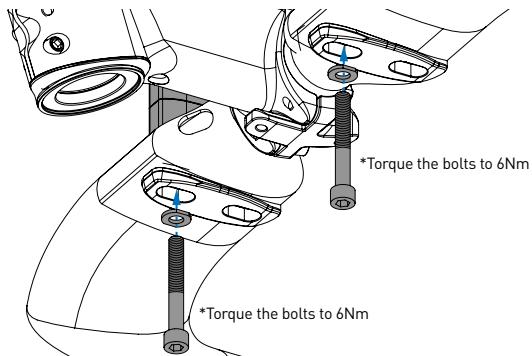


5. Then fit the aerobar bracket on top or riser of the Reach Extender.

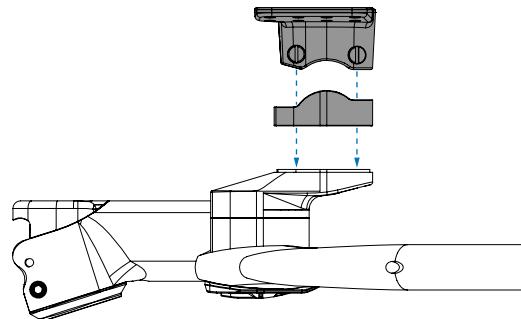

6. Adjust the angle of the bracket to the position you want.

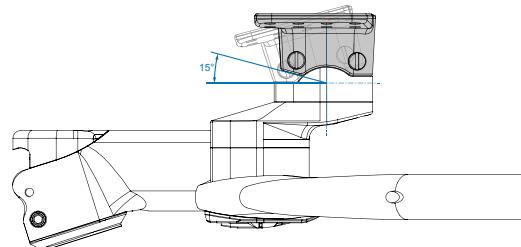


7. Install the middle bolt using the 5mm hex wrench.

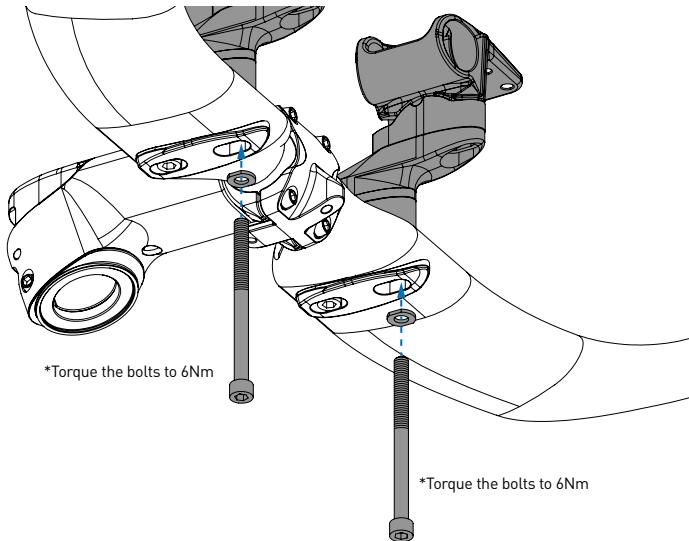

- Use the locator groove on the side of the threaded barrel (in the aerobar bracket) to aid in aligning the barrel for bolt installation.

- If using electronic gears, ensure the cable is sitting in the internal channel to the side of the riser bolt before installing the bracket.

8. Install the front bolt using the 5mm hex wrench.

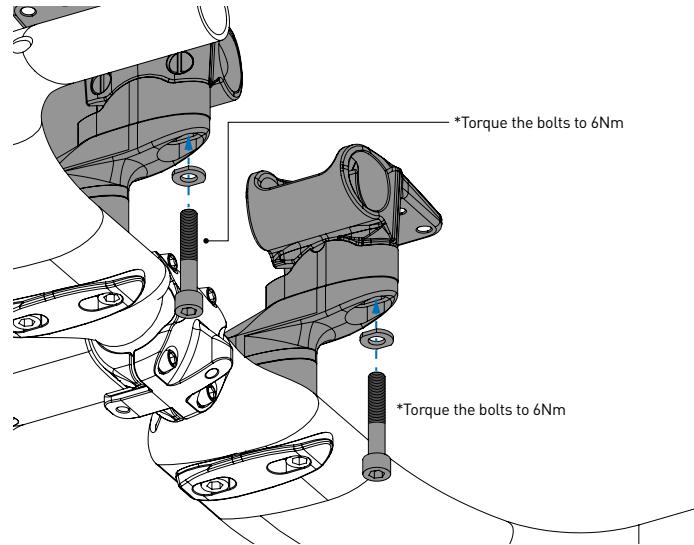

9. Check the placement of the brackets then use the torque wrench with a 5mm fitting to tighten the aerobar bracket clamp to 6Nm.

WARNING:

Using bolts that are too long for the risers and bracket will prevent correct installation.
Bolts that are too short may lead to failure during use.

⚠ WARRANTY POLICY

- **Profile Design Worldwide Two Year Limited Warranty.**
- **Profile Design, LLC (distributor) warrants to the original retail purchaser ("you") that the Profile Design product for which you received this warranty is free from defects in material and workmanship for (2) two years from the date of original retail purchase. For more details on this warranty, its exclusions and/or how to make a claim under the warranty please call +1 310.747.0085 extension 161 or visit www.profile-design.com/pages/warranty**



2677 El Presidio Street
Long Beach, CA 90810
Ph: 310-884-7756

www.profile-design.com

© Profile Design LLC